


# **1x4 HDMI Splitter**

**Supports 3D, 4K@30HZ 4:4:4, HDCP**

## **Operating Instructions**

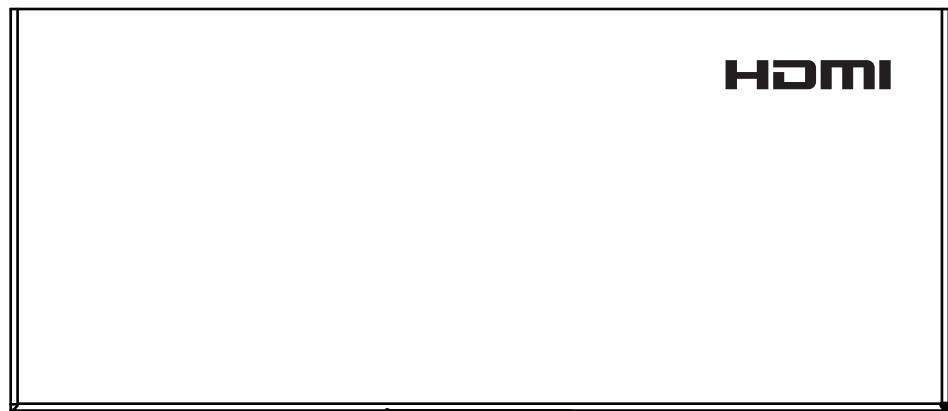

## **Notice**

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute the warranty of any kind, express or implied.

## **Features**

- Simultaneously displays an Ultra Hi-Def source on up to four Ultra HD displays.
- Supports resolution up to 4K@30HZ 4:4:4
- Compatible with HDMI 1.4 and HDCP 1.4
- Supports PCM2.0, DTS, Dolby, LPCM Max CH7.1
- Supports 3D, copy EDID

## **Package Contents**


- 1x HDMI Splitter
- 1x 5V/1A DC Adapter
- 1x User Manual

## SPECIFICATIONS

	-5 to +35°C(+23 to +95°F)
Operating Humidity Range	5 to 90%RH (No Condensation)
Bandwidth frequency	10.2Gbps
Input ports	1xHDMI input (female)
Output ports	4xHDMI outputs (female)
Resolution outputs	up to 4K@30HZ 4:4:4
Audio format	PCM2.0, DTS, Dolby, LPCM Max CH7.1
Dimensions(LxWxH)	150x64.5x17mm
Power consumption	1.5W(MAX)
Net Weight	240g


## PANEL DESCRIPTIONS

## Front Panel

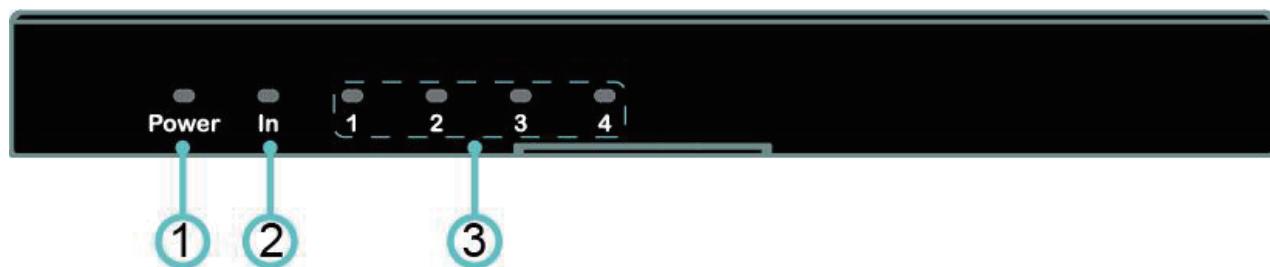

- ① Power indicator
- ② HDMI input indicator
- ③ HDMI output indicator 1-4

## Rear Panel

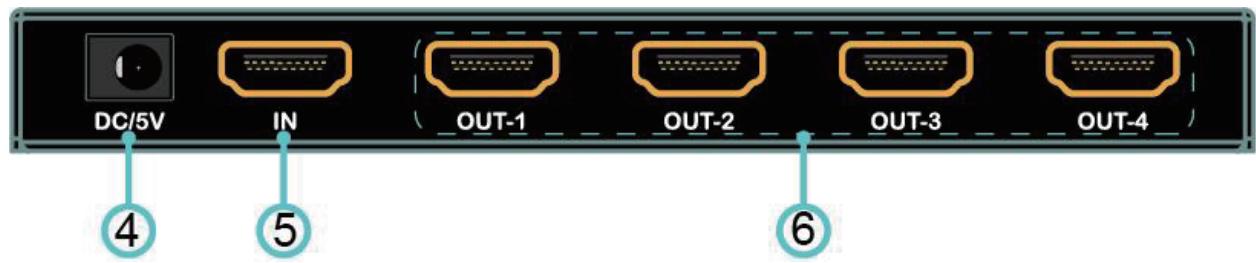

- ④ Power input
- ⑤ HDMI input
- ⑥ HDMI output 1-4

## EDID copy function:

The default EDID mode is to copy the EDID of sink display;

1. If both TV and monitor connected, will copy the monitor EDID in priority
2. If 4K and 1080P display connected, will copy the EDID of 1080P display in priority.
3. If change to connect to higher resolution TV/monitor, need to reboot device firstly, then to copy the new EDID of display.

## Connecting and operating

- 1) Connect the HDMI input source to input port of HDMI splitter.
- 2) Connect the HDMI splitter output ports to the displays.
- 3) Power up splitter, source and displays.

## Connection Diagram

