

HDMI 2.0 1X2 Splitter

with QC 2.0

USER MANUAL



Thank you for purchasing this product. For optimum performance and safety,

please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

1.0 Introduction

This 1 by 2 HDMI UHD Splitter with HDCP 2.2 is an advanced solution for splitting a single HDMI input to two HDMI outputs. It provides high performance audio and video output through HDMI cables up to 4K2K@60Hz (YUV420) resolution and is capable of receiving and transmitting up to 9Gbps of bandwidth with no data loss. Supporting the latest features you can be assured of reliable and high quality HDMI distribution

2.0 Features

1. 1 Port HDMI input, 2 Port HDMI output with 1 USB Charge port
2. Compliant with HDMI2.0, HDCP2.2 and DVI 1.0
3. Support video format up to 4k2k@30Hz with 24bit RGB/YcbCR 4:4:4/YCBCR 4:2:2
4. up to 4k2k@60Hz with 12bit YCBCR 4:2:0
5. Support 3D frame sequential video format up to 1080p@60Hz
6. Support high resolution VESA mode video format up to QSXGA@60Hz
7. Support LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio
8. Support QC2.0, quick charge for your phone


3.0 Package

1. UHD 1x2 HDMI Splitter-----1Pcs
2. 5V/3A DC power adaptor-----1Pcs
3. User manual-----1pcs
4. Color Package-----1pcs

4.0 Specifications

Video Bandwidth	300MHz/10.2 Gbps
Input Ports	1 x HDMI (Female type)
Output Ports	2 x HDMI (Female type)
Output Resolution	480i ~ 1080p50/60, 4 Kx2K@24/30, 4k2k@60Hz with 12bit Y C B C R 4 : 2 : 0, V G A - U X G A
ESD Protection	±8 kV (air-gap discharge) ±4 kV (contact discharge)
Operating Temperature	0 °C~40 °C/ 32 °F~104 °F
Storage Temperature	-20 °C ~ 60 °C/-4 °F ~140 °F
Dimensions	88 mm (W) × 88 mm (D) × 19 mm (H)
Power Supply	5 V/3A DC
Weight :	150g

5.0 Operation controls and Functions

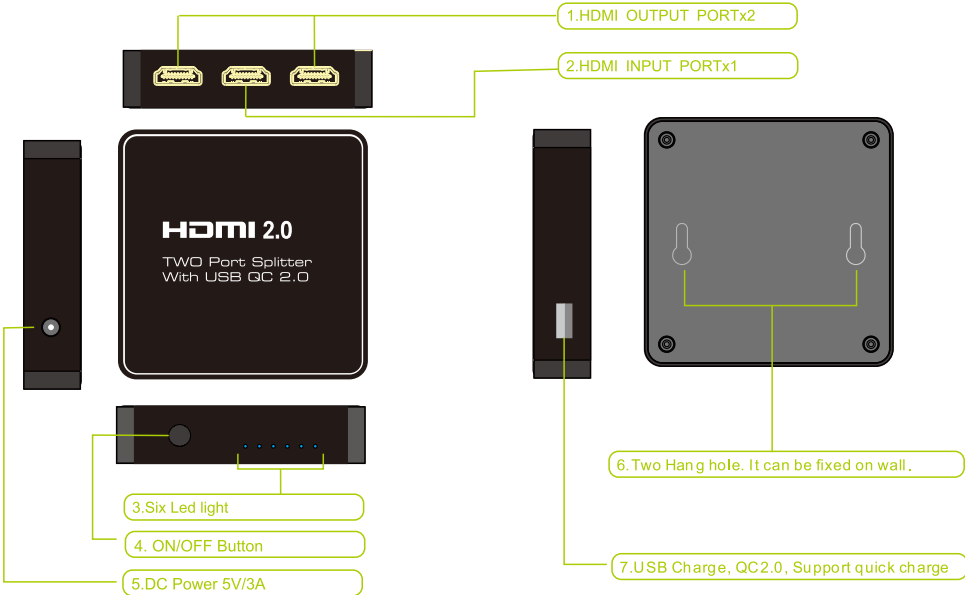

5.0 Connection diagram

