

HDMI to HDMI Decoder with SPDIF + 3.5MM Audio + ARC

USER MANUAL



Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

1.0 Introduction

This HDMI to HDMI+Audio decoder increases the analog stereo and digital toslink audio output on basis of the HDMI signal transmission, also it can support ARC function. The audio signal can be easily connected to the earphones or digital audio power amplifier.

2.0 Features

1. 1 Port HDMI input, 1 Port HDMI output and Audio Extract
2. Audio output support: Toslink X1, Analog Audio X1
3. Compliant with HDMI 1.4a.
4. Support 3D Video & 4Kx2K/30HZ, 8, 10, 12 & 16 bits per color depth
5. No need to install drivers, portable, flexible, plug and play.
6. Support: PCM2, 5.1, 7.1CH, Dolby 5.1, DTS5.1, D-TrueHD, DTS-HD
7. Support: Frequency Bandwidth 2.97Gbps



3.0 Package

1. Main Device-----1PCS
2. 5V/1A DC power adaptor-----1Pcs
3. User manual-----1pcs
4. Color Package-----1pcs

4.0 Specifications

Input Ports	1 x HDMI (Female type)
Output Video	1X HDMI(Female type)
Output Audio	1 x Toslink, 1 x 3.5mm jack
Toslink support	ARC Function
HDMI Audio Output	PCM2, 5.1, 7.1CH, Dolby 5.1, DTS5.1, D-TrueHD, DTS-HD
ESD Protection	±8 kV (air-gap discharge) ±4 kV (contact discharge)
Video Resolution	Up to 4KX2K/30HZ
Operating Temperature	0 °C~40 °C/ 32 °F~104 °F
Storage Temperature	-20 °C ~ 60 °C/-4 °F ~140 °F
Dimensions	80mm (W) × 80 mm (D) × 19 mm (H)
Power Supply	5 V/1A DC

5.0 Operation controls and Functions

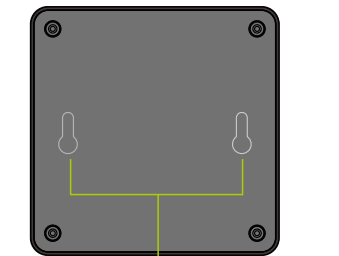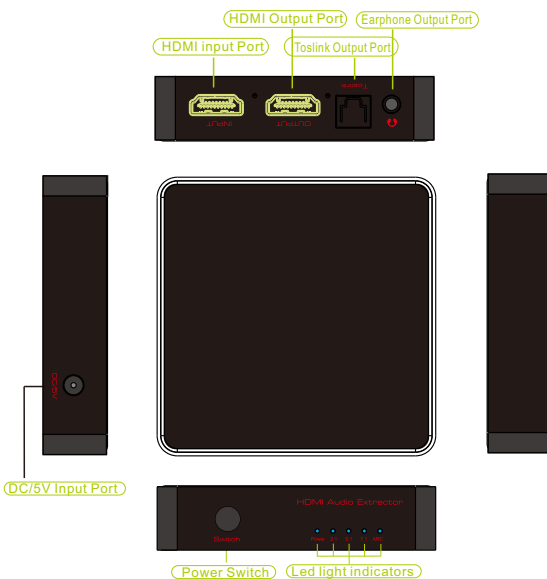

Two hang holes, this device can be fixed on the wall

5.0 Connection diagram

